


MODEL 76 PORTABLE AIR SEPARATOR

**Fisher
Industries**

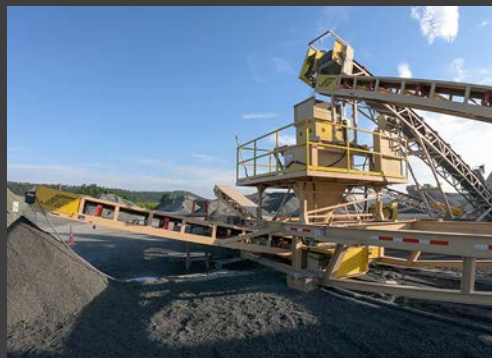

- Designed for up to 60 TPH of 3/8" (10 mm) minus product
- 76" diameter Fisher air separator
- 75 hp 1800 RPM electric motor and VFD
- Automatic oil bath lubrication system
- Hydraulic lift system (feed conveyor, air separator lid, air separator platform)
- Hydraulic lift lid for easy access into cone for inspection and repair
- Heavy-duty beam chassis
- Italtvibras 1/2 hp vibrator
- Walkway and handrail platform around separator
- Removable electrical panel stand with controls and power cord
- Single 25,000 lb, 96" track hub-piloted axle with brakes (10' OD with tires), Neway® airbag suspension, 285/75R24.5 tire on 24.5 x 8.25 hub-pilot wheel
- Special designed wear liners bolted in wear areas
- 18" x 34' feed conveyor with 7.5 hp motorized head pulley with full-length covers and skirted (hydraulically lifted into place)
- (2) 18" x 24' discharge conveyors with 7.5 hp motorized head pulley with full-length covers and skirted
- Available as a stationary unit (no chassis or conveyors included)
- 5th Wheel - 16,000 lbs, Rear axle = 17,000 lbs
- 13'5" x 11'8" x 41'